Changing the toner cartridge
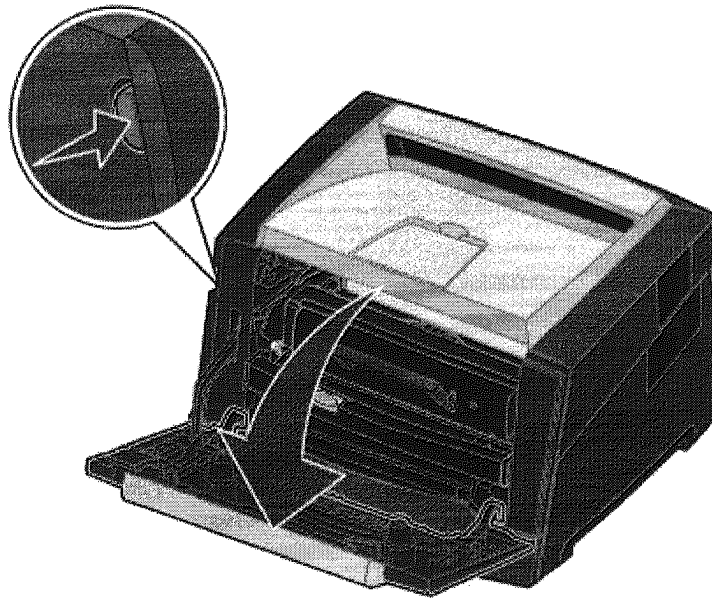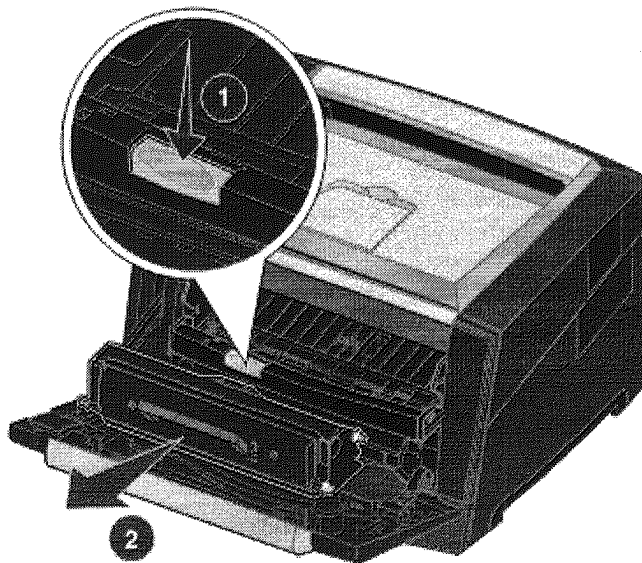
1 Turn the printer off.

2 Press the button on the left side of the printer to release and lower the front door.

3 Remove the toner cartridge.

   a Press the release button on the base of the print cartridge assembly.

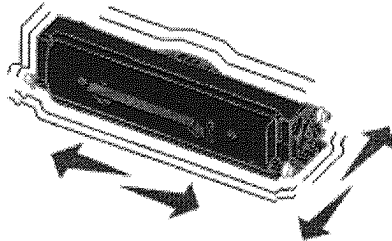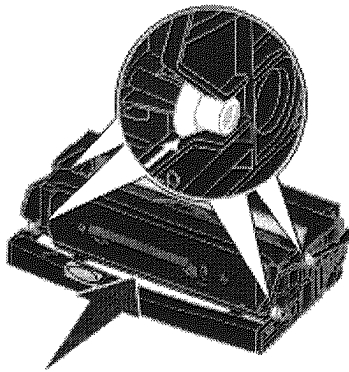   **b** Grasp the handle, pulling up and out to remove the toner cartridge.

4 Unpack the new toner cartridge.

> **Note:** You can use the packing material from the new toner cartridge to ship the old toner cartridge back to Lexmark for recycling. See **Changing the photoconductor kit on page82** for more information.

5 Firmly shake the toner cartridge in all directions to distribute the toner.

6 Install the new toner cartridge by aligning the white rollers on the toner cartridge with the white arrows on the tracks of the photoconductor and pushing the toner cartridge in as far as it will go. The toner cartridge *clicks* into place when correctly installed.

7 Close the front door.

8 Turn the printer back on.